

# System cassette flooring for large tents




**Our large tent flooring system: well conceived down to the last detail. Designed for maximum accuracy, high load bearing capacity, simple handling and efficiency.**

The well-engineered Losberger flooring system has been developed to meet the high demands required of tent flooring systems today.

The excellent fit of the individual elements and small number of components make our system cassette flooring quick and easy

to install, creating a good visual impression. Integrated cable channels with variable cable exits allow cables and supply lines to be laid accurately and thus routed cleanly and invisibly to the required extraction points.

Our cassette flooring can be used for the large tent systems easyflex plus, uniflex and maxiflex. It has a load bearing capacity of up to 350 kg/m<sup>2</sup> and up to 500 kg/m<sup>2</sup> with appropriate underpinning.

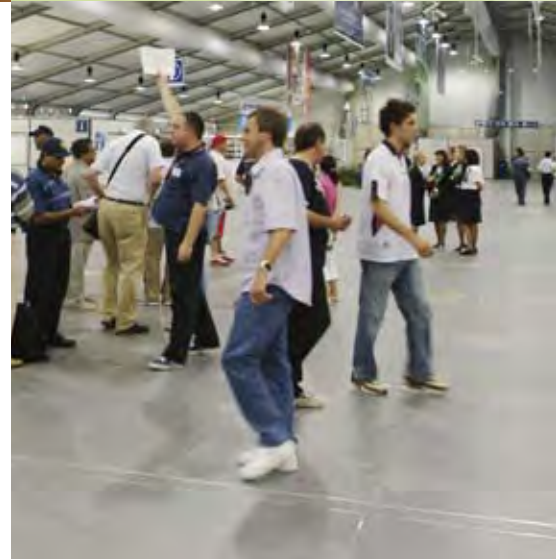

# System cassette flooring for large tents


## Technology

The well conceived system technology makes handling particularly easy.

- Trouble-free transport, storage and maintenance
- Can be extended for annexes and multiple-corner units
- Can be installed quickly and easily
- Integrated cable channels run in 5-m-increments over the entire flooring surface
- Flooring system also suitable for subsequent installation
- Floor cassettes stackable (20 pieces/stacking height 1.88 m) for safe transport and efficient storage

## Floor substructure

Aluminium floor cross supports run concentric with the width of the structure in 5-m-increments. The integrated cable channels can accommodate cables and supply lines. Cable entries and exits can be positioned at virtually any point due to the use of insertion panels available in various lengths.

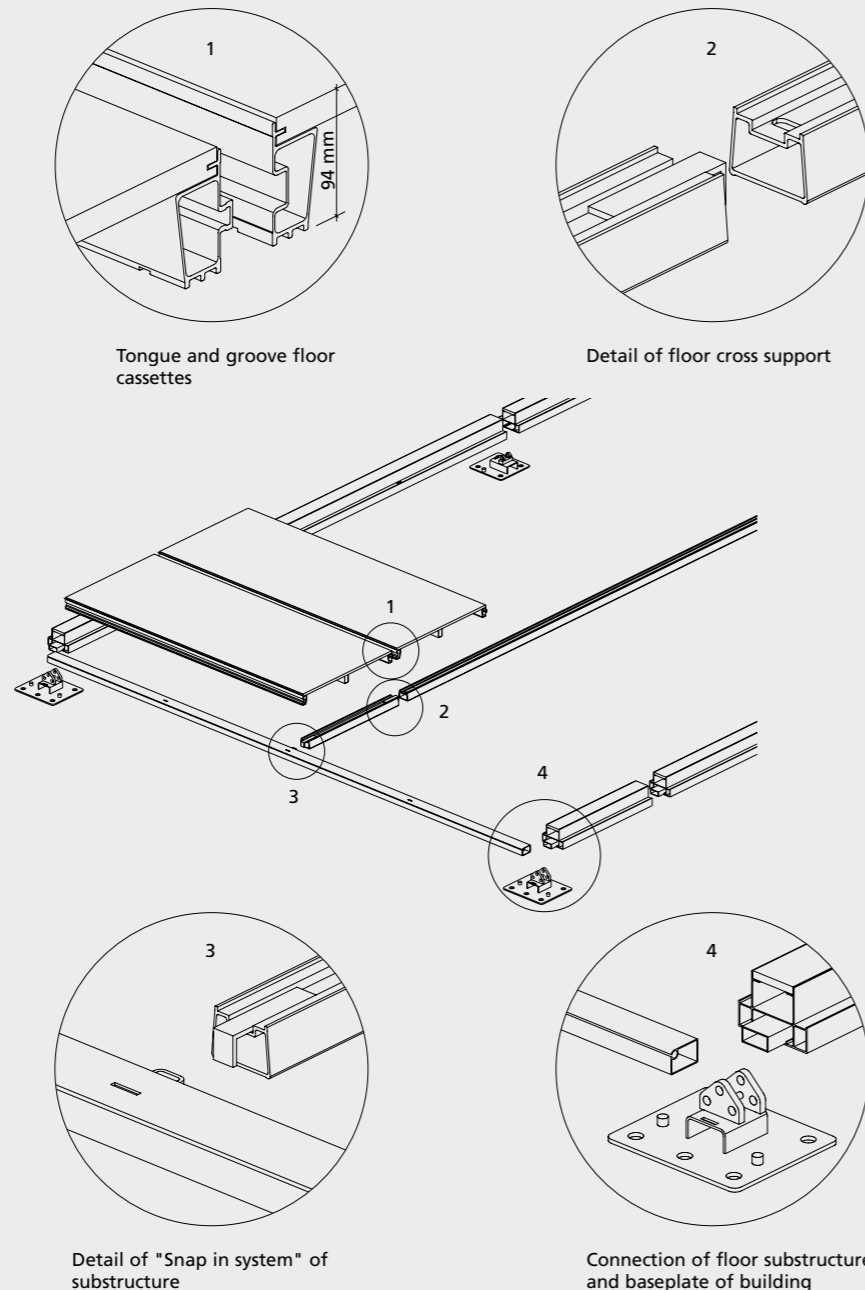

## The floor covering qualities

### ■ Floor covering 1

Three-ply floor covering, WBP 100 glued crosswise to DIN 68705 T3+4, thickness 21 mm, polished on both sides, hot pressed synthetic resin coating. Colour: natural brown. Covering slats of spruce/fir, jointed from equally wide slats, cut edges sealed. Head ends of unprotected edges fitted with galvanized U-profile edge protection.

### ■ Floor covering 2


Finnish birch multiply wooden board, approx. 15-ply WBP 100 glued to DIN 68705 T3, thickness 21 mm. Symmetrical veneer structure with equally thick veneers. Birch all through. Surface coating with 220 – 240 g/m<sup>2</sup> phenol resin film. Screen-print non-slip top surface with smooth underside. Colour: standard brown. Open edges coated and sealed with epoxy resin or acrylic resin varnish. Head ends of unprotected edges can be fitted with galvanized U-profile edge protection at a surcharge on request.

### ■ Floor covering 3


Finnish birch multiply wooden board, approx. 15-ply WBP 100 glued to DIN 68705 T3, thickness 21 mm. Surface coating with approx. 660 g/m<sup>2</sup> melamine resin film. Colour: dark-grey with top surface. Open edges coated and sealed with epoxy resin or acrylic resin varnish. In case of purchasing, head ends of unprotected edges can be fitted with galvanized U-profile edge protection at a surcharge on request. In the Rental Department, the fitting is standardized with galvanized edge protection.

## The floor frame


Along the longitudinal edges, aluminium supporting profiles. Integrated tongue and groove profiling for offset-free surfaces. Centre supporting profile of steel square tube. The floor frame can be combined with all flooring panels.

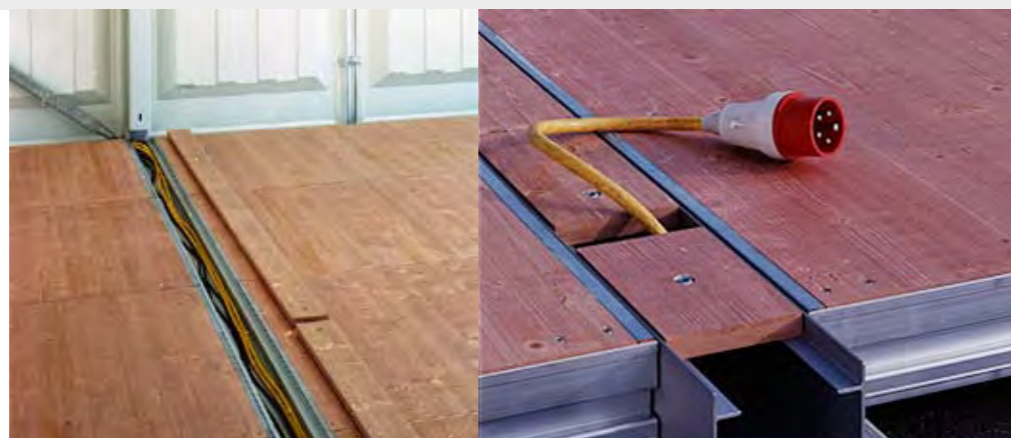

System cassette flooring with integrated cable channel and variable cable exit positioning

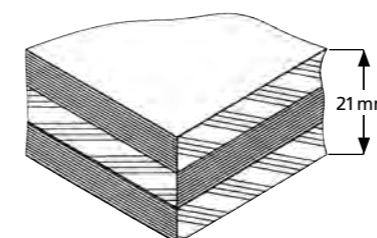

Floor covering 1

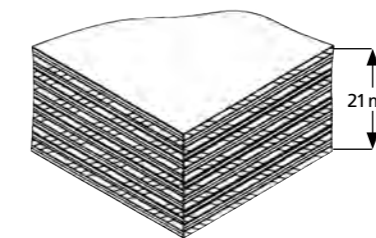

Floor covering 2 and 3



Losberger system cassette flooring covering 1



Losberger system cassette flooring covering 3

### System cassette flooring for large tents

System cassette flooring for large tents		Floor cassette			Substructure		Total weight (kg/m <sup>2</sup> )
		L x W (m)	Covering**	Weight per cassette (kg)	Design	Longest component (m)	
Basic units* easyflex plus uniflex maxiflex	all available spans	2.431 x 1.000	1	41.8	Aluminium profiles with cable channel	up to 5.500	approx. 21.0 approx. 25.0 approx. 26.0
			2	52.2			
			3	54.0			

\* The system cassette flooring is also available for annexes and multiple-corner units with application of special parts.

\*\* The portfolio of the Losberger Rental Department includes only covering 1 and 3.

Losberger GmbH  
Fürfeld · Gottlieb-Daimler-Ring 14  
74906 Bad Rappenau · Germany  
Phone: +49 7066 980-0  
Fax: +49 7066 980232  
E-Mail: losberger@losberger.com  
www.losberger.com

Subsidiaries and Agencies Worldwide.

NOTE: Subject to alterations in the interest of product improvement in line with state-of-the-art technology progress.

